



*20' MIN. FOR SINGLE FAMILY AND DUPLEX RESIDENTIAL

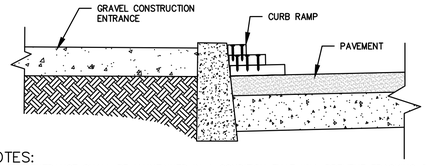



NOTES:

1. THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION THAT WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHT–OF–WAYS. THIS MAY REQUIRE TOP DRESSING, REPAIR AND/OR CLEAN OUT OF ANY MEASURES USED TO TRAP SEDIMENT.
2. WHEN NECESSARY, WHEELS SHALL BE CLEANED PRIOR TO ENTRANCE ONTO PUBLIC RIGHT–OF– WAY.
3. WHEN WASHING IS REQUIRED, IT SHALL BE DONE ON AN AREA STABILIZED WITH CRUSHED STONE THAT DRAINS INTO AN APPROVED SEDIMENT TRAP OR SEDIMENT BASIN.
4. WHERE RUNOFF CONTAINING SEDIMENT LADEN WATER IS LEAVING THE SITE VIA THE CONSTRUCTION ENTRANCE, OTHER MEASURES SHALL BE IMPLEMENTED TO DIVERT RUNOFF THROUGH AN APPROVED FILTERING SYSTEM.
5. DIMENSIONS
   SINGLE FAMILY
   20' LONG BY 20' WIDE 8" DEEP OF ¾" MINUS CLEAN ROCK.
   COMMERCIAL
   50' LONG BY 20' WIDE 3–6" CLEAN ROCK,
   GOVERNING AUTHORITY MAY REQUIRE GEOTEXTILE FABRIC TO PREVENT SUB–SOIL PUMPING.

FOR FURTHER INFORMATION ON DESIGN CRITERIA SEE CHAPTER 4 OF CLEAN WATER SERVICES EROSION PREVENTION AND SEDIMENT CONTROL PLANNING AND DESIGN MANUAL.

## CONSTRUCTION ENTRANCE

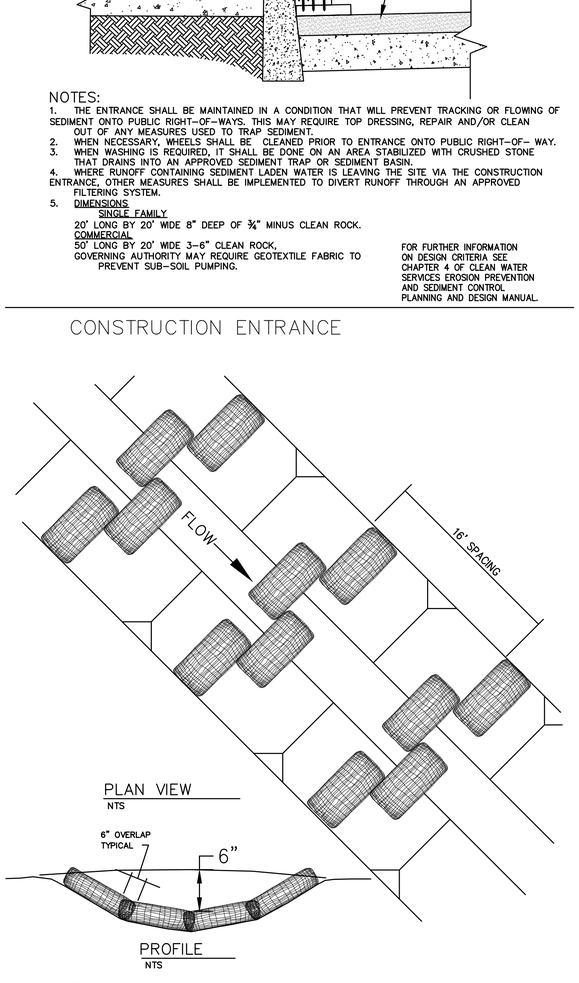



NOTES:

1. STAKING OF BAGS REQUIRED USING 2 1"X2" WOOD STAKES OR APPROVED EQUAL PER BAG.
2. SURFACE MUST BE SMOOTH BEFORE APPLICATION.
3. CHECK DAMS CAN BE CONSTRUCTED USING STRAW WATTLES OR OTHER MATERIALS AS APPROVED BY THE DISTRICT OR CITY.

CHECK DAM BIO-FILTER BAG


N.T.S.

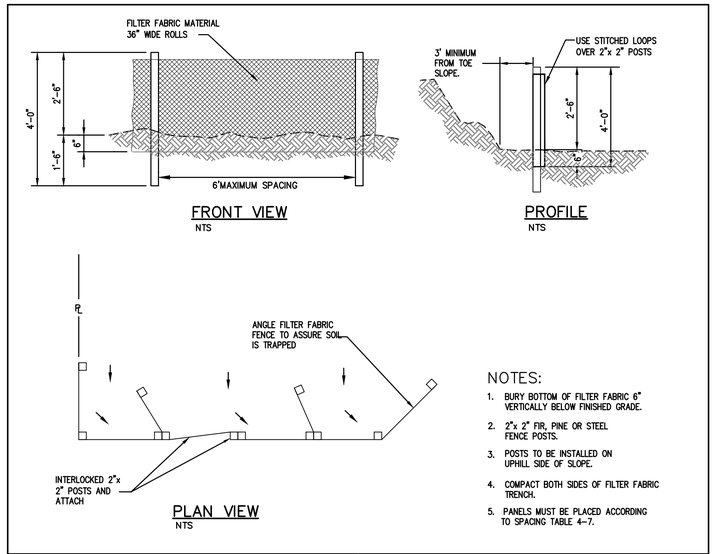


NOTES:

1. BURY BOTTOM OF FILTER FABRIC 6" VERTICALLY BELOW FINISHED GRADE.
2. 2"x 2" FIR, PINE OR STEEL FENCE POSTS.
3. POSTS TO BE INSTALLED ON UPHILL SIDE OF SLOPE.
4. COMPACT BOTH SIDES OF FILTER FABRIC TRENCH.
5. PANELS MUST BE PLACED ACCORDING TO SPACING TABLE 4–7.

| SEDIMENT FENCE | Detail Drawing 4–16 |
|---|---|

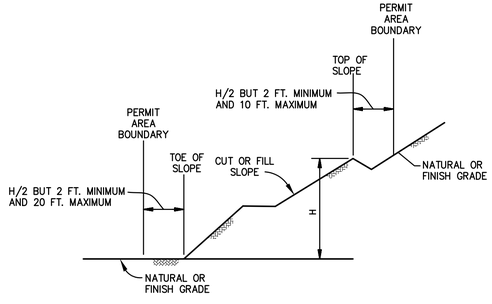


GRADING SETBACK DIMENSIONS

N.T.S.

## STORM DRAINAGE:

1. THE CONTRACTOR SHALL USE PIPE MATERIALS AS DESCRIBED ON PLANS. ANY REVISIONS SHALL BE APPROVED BY THE DESIGN ENGINEER AND C.W.S.
2. ACCEPTABLE STORM DRAIN MATERIALS ARE AS SHOWN ON PLAN AND PROFILE SHEETS AND SHALL BE TESTED IN ACCORDANCE WITH C.W.S. STANDARD SPECIFICATIONS. R&O – 19–22.
3. STORM DRAIN PIPES SHALL BE RUBBER GASKETED. LATERALS TO BE WHITE IN COLOR AND MEET THE COVER REQUIREMENTS OF SECTION 5.06.7 CWS R&O 19–22.
4. ALL TESTING OF STORM SEWERS AND SANITARY SEWERS ARE TO BE IN ACCORDANCE WITH C.W.S. REQUIREMENTS.

## EXCAVATION & GRADING:

1. THE CONTRACTOR SHALL DETERMINE THE TYPE OF EQUIPMENT AND METHOD TO USE TO ACHIEVE REQUIRED COMPACTION. THE CONTRACTOR SHALL ARRANGE FOR A GEOTECHNICAL ENGINEER TO TEST AND CERTIFY SOIL COMPACTION AT DRIVEWAY. WASHINGTON COUNTY, AND THE ENGINEER SHALL RECEIVE COPIES OF ALL GEOTECHNICAL INSPECTION AND TEST REPORTS.
2. PIPE BEDDING SHALL CONFORM TO THE GRANULAR BEDDING AND BACKFILL REQUIREMENTS OF CWS AS APPLICABLE. BEDDING SHALL BE 3/4"–0" CRUSHED ROCK, EXCEPT WHERE NATIVE MATERIAL MAY BE USED.
3. TRENCH BACKFILL WITHIN THE RIGHT–OF–WAY SHALL BE CLEAN, WELL–GRADED 3/4"–0" CRUSHED ROCK COMPACTED TO 95% AASHTO –99.
4. ALL AREAS OF FILL THAT WILL BE WITHIN A FUTURE BUILDING ENVELOPE SHALL BE COMPACTED IN ACCORDANCE WITH THE UBC, CHAPTER 33.
5. THE CONTRACTOR SHALL PROVIDE PROTECTION TO ADJOINING PROPERTY FROM EXCAVATION AND FILL ACTIVITIES AND FROM SEDIMENTATION DUE TO RUNOFF. THIS MAY BE ACCOMPLISHED BY THE INSTALLATION OF APPROPRIATE DRAINAGE DITCHES NEAR THE PROPERTY BOUNDARIES AND BY KEEPING GRADING ACTIVITIES AT LEAST 2 FEET AWAY FROM PROPERTY BOUNDARIES, AS REQUIRED BY THE UBC CHAPTER 33.

## GENERAL NOTES:

1. ALL WORK AND MATERIAL SHALL CONFORM TO THE REQUIREMENTS OF THE WASHINGTON COUNTY DESIGN STANDARDS, & CWS DESIGN & CONSTRUCTION STANDARDS, R&O 19–22.
2. THE CONTRACTOR SHALL OBTAIN ALL REQUIRED PERMITS AND LICENSES BEFORE STARTING CONSTRUCTION.
3. EXISTING UTILITY LOCATIONS SHOWN ARE APPROXIMATE ONLY; ADDITIONAL UNDERGROUND UTILITIES MAY EXIST. THE CONTRACTOR SHALL VERIFY ALL UTILITY LOCATIONS PRIOR TO CONSTRUCTION AND SHALL ARRANGE FOR THE RELOCATION OF ANY IN CONFLICT WITH THE PROPOSED CONSTRUCTION.
4. THE ENGINEER HAS BEEN RETAINED TO PROVIDE DESIGN AND CONSTRUCTION REVIEW SERVICES RELATING TO THE CONTRACT.
5. THE CONTRACTOR SHALL NOTIFY THE ENGINEER, WASHINGTON COUNTY & C.W.S. 24 HOURS BEFORE STARTING CONSTRUCTION OR RESUMING WORK AFTER SHUTDOWNS, EXCEPT FOR NORMAL RESUMPTION OF WORK FOLLOWING SUNDAYS OR HOLIDAYS. CWS INSPECTOR HOT LINE #: 503–681–4444.
6. THE CONTRACTOR SHALL ASSIST THE ENGINEER IN PREPARING AS–CONSTRUCTED DRAWINGS.
7. A DEMOLITION PERMIT FROM BOTH CWS & WASHINGTON COUNTY IS REQUIRED FOR REMOVAL OF EXISTING BUILDINGS.
8. ALL STREET SIGNS, BARRICADES AND PAVEMENT MARKINGS SHALL BE FURNISHED AND INSTALLED BY THE DEVELOPER AT HIS EXPENSE.

## STANDARD EROSION CONTROL NOTES FOR SITES LESS THAN 1 ACRE:

1. WHEN RAINFALL AND RUNOFF OCCURS DAILY INSPECTIONS OF THE EROSI AND SEDIMENT CONTROLS AND DISCHARGE OUTFALLS MUST BE PROVIDED SOME ONE KNOWLEDGEABLE AND EXPERIENCED IN THE PRINCIPLES, PRACTICES, INSTALLATION, AND MAINTENANCE OF EROSION AND SEDIMEN CONTROLS WHO WORKS FOR THE PERMITTEE.
2. CONSTRUCTION ACTIVITIES MUST AVOID OR MINIMIZE EXCAVATION AND CREATION OF BARE GROUND FROM OCTOBER 1 THROUGH MAY 31 EACH YEAR.
3. DURING WET WEATHER PERIOD, TEMPORARY STABILIZATION OF THE SITE MUST OCCUR AT THE END OF EACH WORK DAY.
4. SEDIMENT CONTROLS MUST BE INSTALLED AND MAINTAINED ON ALL DOWN GRADIENT SIDES OF THE CONSTRUCTION SITE AT ALL TIMES DURING CONSTRUCTION. THEY MUST REMAIN IN PLACE UNTIL PERMANENT VEGETATION OR OTHER PERMANENT COVERING OF EXPOSED SOIL IS ESTABLISHED.
5. ALL ACTIVE INLETS MUST HAVE SEDIMENT CONTROLS INSTALLED AND MAINTAINED AT ALL TIMES DURING CONSTRUCTION. UNLESS OTHERWISE APPROVED, A SURFACE MOUNTED AND ATTACHABLE, U–SHAPED FILTER BAG IS REQUIRED FOR ALL CURB INLET CATCH BASINS.
6. SIGNIFICANT AMOUNTS OF SEDIMENT WHICH LEAVES THE SITE MUST BE CLEANED UP WITHIN 24 HOURS AND PLACED BACK ON THE SITE AND STABILIZED OR PROPERLY DISPOSED. THE CAUSE OF THE SEDIMENT RELEASE MUST BE FOUND AND PREVENTED FROM CAUSING A RECURRENCE OF THE DISCHARGE WITHIN THE SAME 24 HOURS. ANY IN–STREAM CLEAN UP OF SEDIMENT SHALL BE PREFORMED ACCORDING TO THE OREGON DEPARTMENT OF STATE LANDS REQUIRED TIME FRAME.
7. SEDIMENT MUST NOT BE INTENTIONALLY WASHED INTO STORM SEWERS, DRAINAGE WAYS, OR WATER BODIES.
8. SEDIMENT MUST BE REMOVED FROM BEHIND ALL SEDIMENT CONTROL MEASURES WHEN IT HAS REACHED A HEIGHT OF 1/3RD THE BARRIER HEIGHT, AND PRIOR TO THE CONTROL MEASURES REMOVAL.
9. CLEANING OF ALL STRUCTURES WITH SUMPS MUST OCCUR WHEN THE SEDIMENT RETENTION CAPACITY HAS BEEN REDUCED BY 50% AND AT COMPLETION OF PROJECT.
10. ANY USE OF TOXIC OR OTHER HAZARDOUS MATERIALS MUST INCLUDE PROPER STORAGE, APPLICATION, AND DISPOSAL.
11. THE PERMITTEE MUST PROPERLY MANAGE HAZARDOUS WASTES, USED OILS, CONTAMINATED SOILS, CONCRETE WASTE, SANITARY WASTE, LIQUID WASTE, OR OTHER TOXIC SUBSTANCES DISCOVERED OR GENERATED DURING CONSTRUCTION.
12. THE APPLICATION RATE OF FERTILIZERS USED TO REESTABLISH VEGETATION MUST FOLLOW MANUFACTURER'S RECOMMENDATIONS. NUTRIENT RELEASES FROM FERTILIZERS TO SURFACE WATERS MUST BE MINIMIZED. TIME RELEASE FERTILIZERS SHOULD BE USED AND CARE SHOULD BE MADE IN APPLICATION OF FERTILIZERS WITHIN ANY WATER WAY RIPARIAN ZONE.
13. OWNER OR DESIGNATED PERSON SHALL BE RESPONSIBLE FOR PROPER INSTALLATION AND MAINTENANCE OF ALL EROSION AND SEDIMENT CONTROL MEASURES, IN ACCORDANCE WITH CURRENT CLEAN WATER SERVICES STANDARDS AND STATE, AND FEDERAL REGULATIONS.
14. PRIOR TO ANY LAND DISTURBING ACTIVITIES, THE BOUNDARIES OF THE CLEARING LIMITS, VEGETATED BUFFERS, AND ANY SENSITIVE AREAS SHOWN ON THIS PLAN SHALL BE CLEARLY DELINEATED IN THE FIELD. UNLESS OTHERWISE APPROVED, NO DISTURBANCE IS PERMITTED BEYOND THE CLEARING LIMITS. THE OWNER/PERMITTEE MUST MAINTAIN THE DELINEATION FOR THE DURATION OF THE PROJECT.
    NOTE: VEGETATED CORRIDORS TO BE DELINEATED WITH ORANGE CONSTRUCTION FENCE OR APPROVED EQUAL.
15. PRIOR TO ANY LAND DISTURBING ACTIVITIES, THE BMPS THAT MUST BE INSTALLED ARE GRAVEL CONSTRUCTION ENTRANCE, PERIMETER SEDIMENT CONTROL, AND INLET PROTECTION. THESE BMPS MUST BE MAINTAINED FOR THE DURATION OF THE PROJECT.
16. IF VEGETATIVE SEED MIXES ARE SPECIFIED, SEEDING MUST TAKE PLACE NO LATER THAN SEPTEMBER 1ST; THE TYPE AND PERCENTAGES OF SEED IN THE MIX ARE AS IDENTIFIED ON THE PLANS OR AS SPECIFIED BY THE DESIGN ENGINEER.
17. WATER–TIGHT TRUCKS MUST BE USED TO TRANSPORT SATURATED SOILS FROM THE CONSTRUCTION SITE. AN APPROVED EQUIVALENT IS TO DRAIN THE SOIL ON SITE AT A DESIGNATED LOCATION USING APPROPRIATE BMPS; SOIL MUST BE DRAINED SUFFICIENTLY FOR MINIMAL SPILLAGE.
18. ALL PUMPING OF SEDIMENT LADEN WATER MUST BE DISCHARGED OVER AN UNDISTURBED, PREFERABLY VEGETATED AREA, AND THROUGH A SEDIMENT CONTROL BMP I.E. FILTER BAG.
19. THE ESC PLAN MUST BE KEPT ONSITE. ALL MEASURES SHOWN ON THE PLAN MUST BE INSTALLED PROPERLY TO ENSURE THAT SEDIMENT LADEN WATER DOES NOT ENTER A SURFACE WATER SYSTEM, ROADWAY, OR OTHER PROPERTIES.
20. THE ESC MEASURES SHOWN ON THIS PLAN ARE THE MINIMUM REQUIREMENTS FOR ANTICIPATED SITE CONDITIONS. DURING THE CONSTRUCTION PERIOD, THESE MEASURES SHALL BE UPGRADED AS NEEDED TO MAINTAIN COMPLIANCE WITH ALL REGULATIONS.
21. WRITTEN ESC LOGS ARE SUGGESTED TO BE MAINTAINED ONSITE AND AVAILABLE TO DISTRICT INSPECTORS UPON REQUEST.
22. IN AREAS SUBJECT TO WIND EROSION, APPROPRIATE BMPS MUST BE USED WHICH MAY INCLUDE THE APPLICATION OF FINE WATER SPRAYING, PLASTIC SHEETING, MULCHING, OR OTHER APPROVED MEASURES.
23. ALL EXPOSED SOILS MUST BE COVERED DURING WET WEATHER PERIOD.

REVIEWED FOR CODE COMPLIANCE
VALIDITY OF PERMIT
The issuance or granting of a permit or approval of plans, specifications and computations shall not be construed to be a permit for, or an approval of, any violation of the provisions of this code or of any other ordinance of the jurisdiction
DATE 1/7/2026
BLDG-2514996

NW TIMM
TAX MAP
TAX
FOREST GI

GRADING AND EROSION CONTROL NOTES AND DETAILS

| NO. | DATE | REVISIONS DESCRIPTION |
|---|---|---|
| | | |

EMERIO
ENGINEERING • SURVEYING • DESIGN
6445 SW FALLBROOK PLACE, SUITE 100
BEAVERTON, OREGON 97008
TEL: (503) 746-8812
FAX: (503) 644-8052
www.emeriodesign.com

REGISTERED PROFESSIONAL ENGINEER
95296PE
OREGON
DIGITALLY SIGNED 2025.10.23 13:47:43 07'00'
ALFREDO PEREZ-ALONZO
EXPIRES: 12/31/2026

SHEET 4 OF 4

FILE:P:\1916-001 Timmerman Road\dwg\civil\1916-001_04notes, Layout: 4 EROSION CONTROL NOTES & DETAILS, Plot Date: 10/22/2025 10:28 AM, by: Kyung Han